

Cabling

6FT AC CABLE, LP-31 NEMA 5-15P Connector
 4 ft DC Cable, SJT-2 type, 14 AWG terminated in XLR connector

Float - Maintenance Stage

Float Volt: 26.8 - 27.4 VDC
 Float Amp: 0 - 3.5 Amps
 Green LED ON, Yellow LED OFF

Absorption

Absorption Voltage: 28.3 - 30 VDC
 Absorption Current: 3.5 - 7.0 Amps
 LED status: Green and Yellow LED's ON

Full Load - Bulk Stage

Full Load Voltage: 22 - 28.3 VDC
 Full Load Current: 7.0 - 8.0 Amps

Short circuit/Overload Protection

Short Circuit Current: 0 A
 Current Limit: 10 Amps (+-10%)

Operating Temperature Range


Min Temperature: -20 C
 Max Temperature: 50 C

Storage Temperature Range

Max Temperature: 70 C

Certifications

CE Class B defined by the EN50081 for radiated and conducted emissions.
 Certified to UL 1012.
 Complies with ANSI/RESNA WC, Volume 2, Section 14

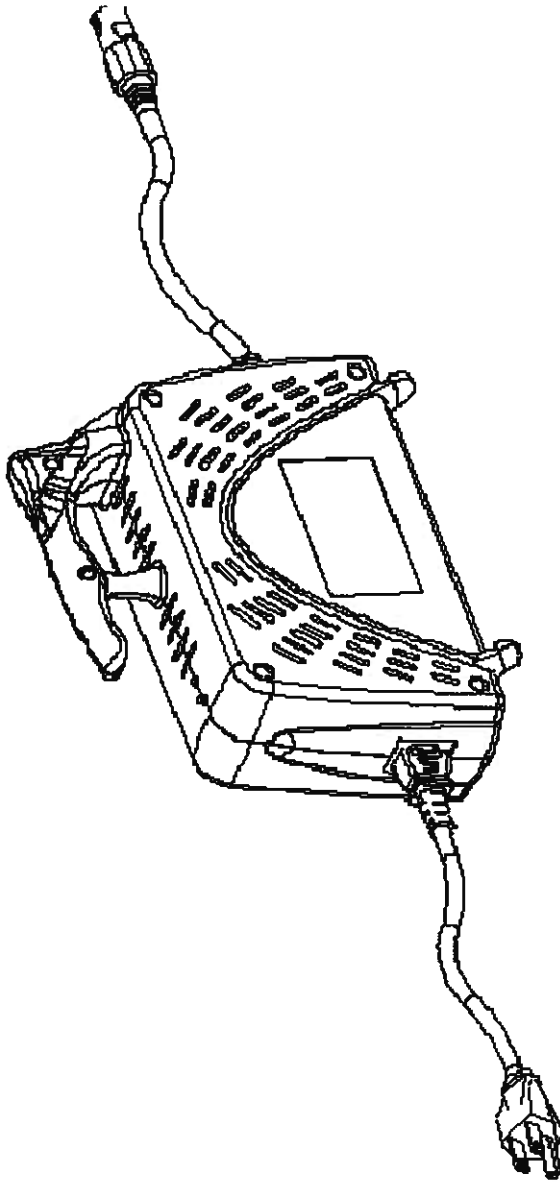

*Part not drawn to scale.

DEL CITY	DESCRIPTION
Height	7.8" (19.9 CM)
Width	9.5" (24.2 CM)
Depth	2.9" (7.5 CM)
Weight	6.3 lbs
Input Voltage	95 - 135 VAC
Input Amp	4.0 Max
Max Battery Size	90 Amp - Hours
Max Recharge	12 - 14 Hours
Portable 8A Mobility Charger	
Date: 7/03/08	PART NO: 57010

UNCONTROLLED COPY