

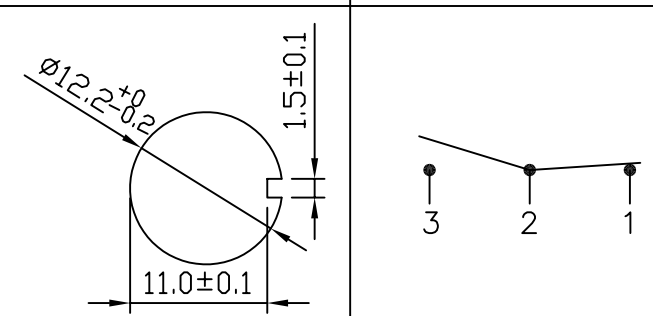





Rating	20A 125V,10A 277V AC 3/4HP 125-250 VAC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.	 <p>The 'Mount Hole' diagram shows a circular hole with a diameter of $\phi 12.2^{+0}_{-0.2}$ mm. The distance from the center of the hole to the top edge is 11.0 ± 0.1 mm. The distance from the center of the hole to the bottom edge is 1.5 ± 0.1 mm. The 'Circuit Structure' diagram shows a 3P SPDT ON-ON switch with terminals labeled 1, 2, and 3.</p>	
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	3P SPDT ON-ON		
Operation Force	600g \pm 200g		

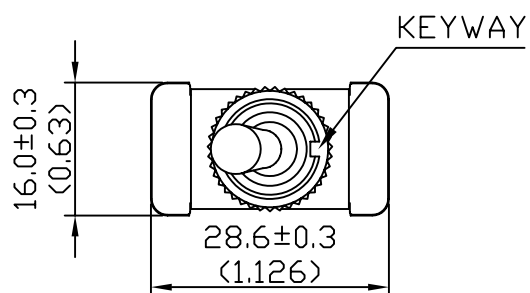


1 HEX NUT ASSY
1 KNURL NUT ASSY

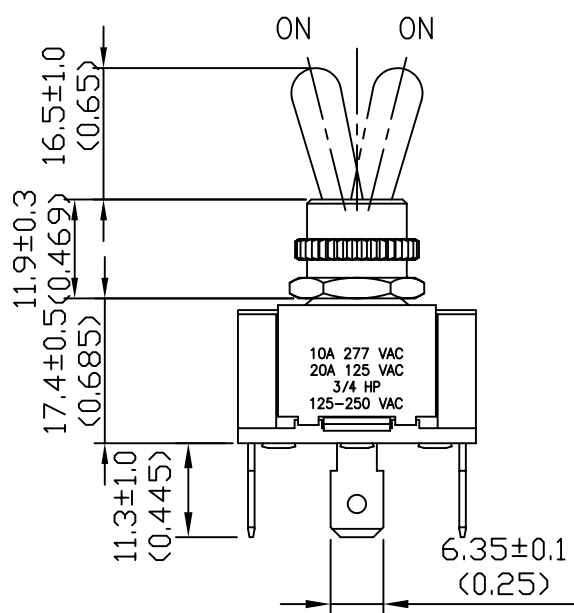

15/32-32 NS-2A

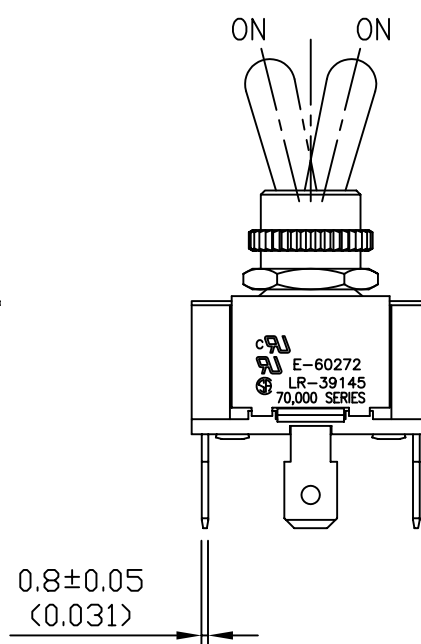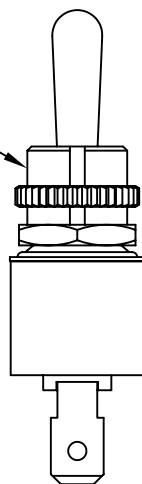

Unit	mm (inch)	DEL CITY P/N	7200033	REV.	1	
-------------	--------------	---------------------	---------	-------------	---	---