




Rating	16A 125VAC 1/3HP	Mount Hole	Circuit Structure	
Contact R	50m ohm Max.		OFF	
Insulation R	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute	Thickness		X
Operation Temperature	-20°C~+85°C	0.75...1.25	19.2-0.1	13.2+0.1
Circuit	3P SPST ON-OFF(Illuminated)	1.25...2	19.4-0.1	13.2+0.1
		2...3	19.8-0.1	13.2+0.1



ROCKER: RED  
HOUSING: BLACK

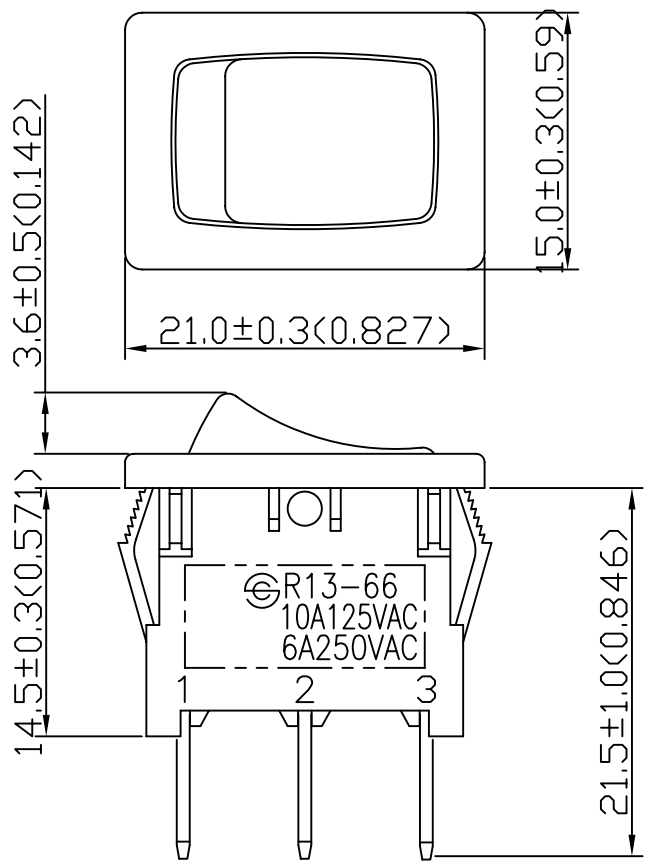