
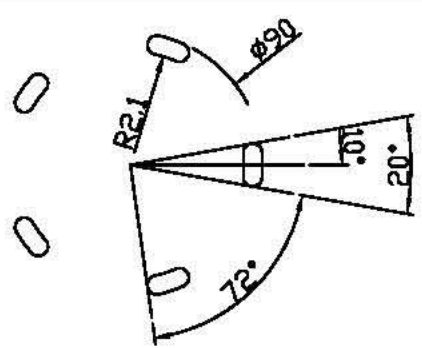
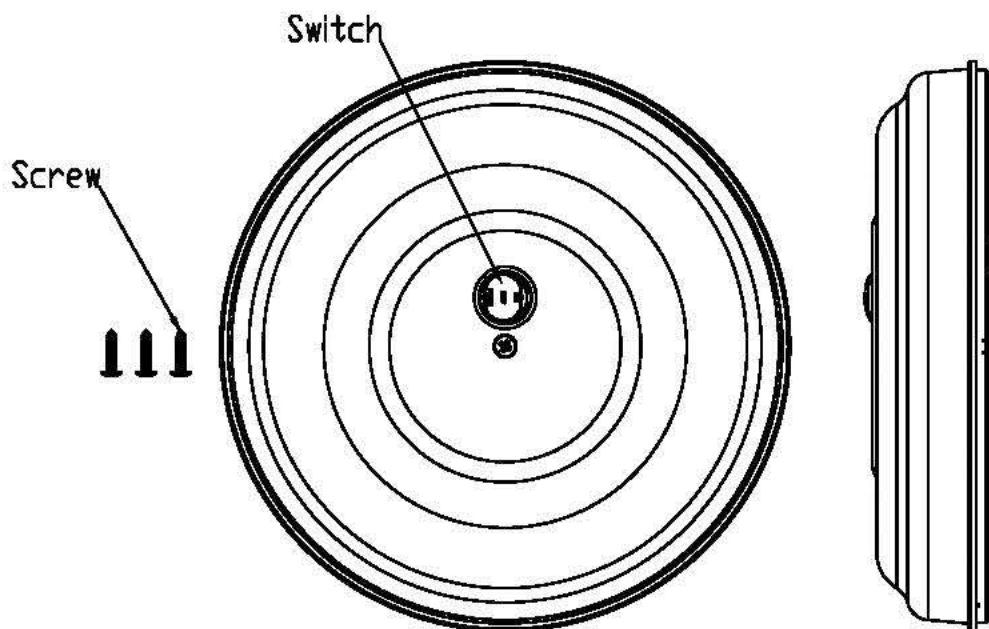


Rating	12 VDC/1.4A(Max)	 <p>Mounting Hole</p>
Insulation R	DC 500V 100MΩ Min.	
Voltage Breakdown	AC 1500V 1 minute	
Operating Temperature	0℃~40℃	
Lamp Life Cycle	5000 hrs(refer lamp maker's data)	
Lamp Type	FCL-22W/G10q	
Operation Voltage	11~16 VDC	
Measuring Voltage	at 13.6 VDC	

Electrical life test

Item	Spec
Temperature rise test	13.6 VDC test 4.5 hrs record test point as specification list
Starter boost test	13.6 VDC 10000 cycles when on,light must be complete start on 3 secs
Environmental test	-5℃/45℃ each temp. 4 hrs per 1 cycle,test 48 hrs test item must be in marked temp.can normal on-Off
Endurance test	15 VDC T40/168 hrs while test,on 21 hrs off 3 hrs per 1 cycle,test to 168 hrs

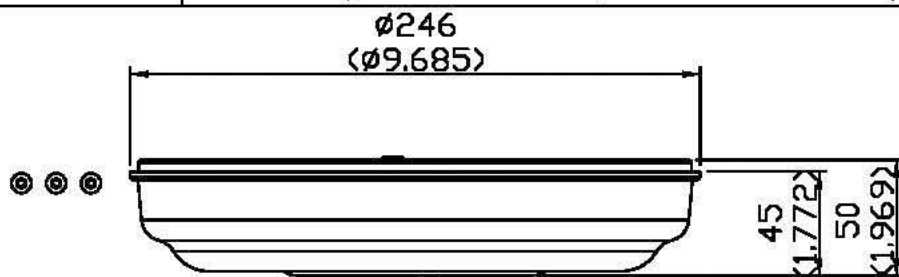

								△
								△
Date	Name	Description				REV.	0	NO
Drawing	Check	Approval			Model Name	Car Interior Light		
			DELCTY P/N	7595				
03/19/07			Unit	mm/(inch)				