
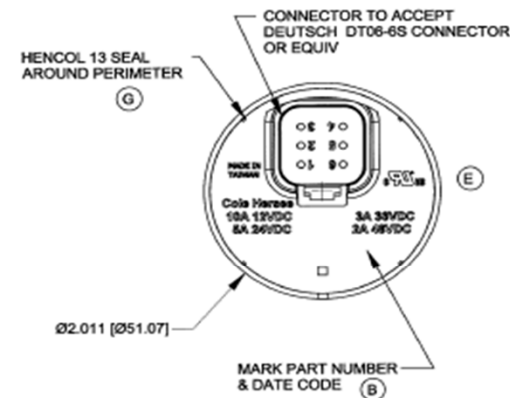


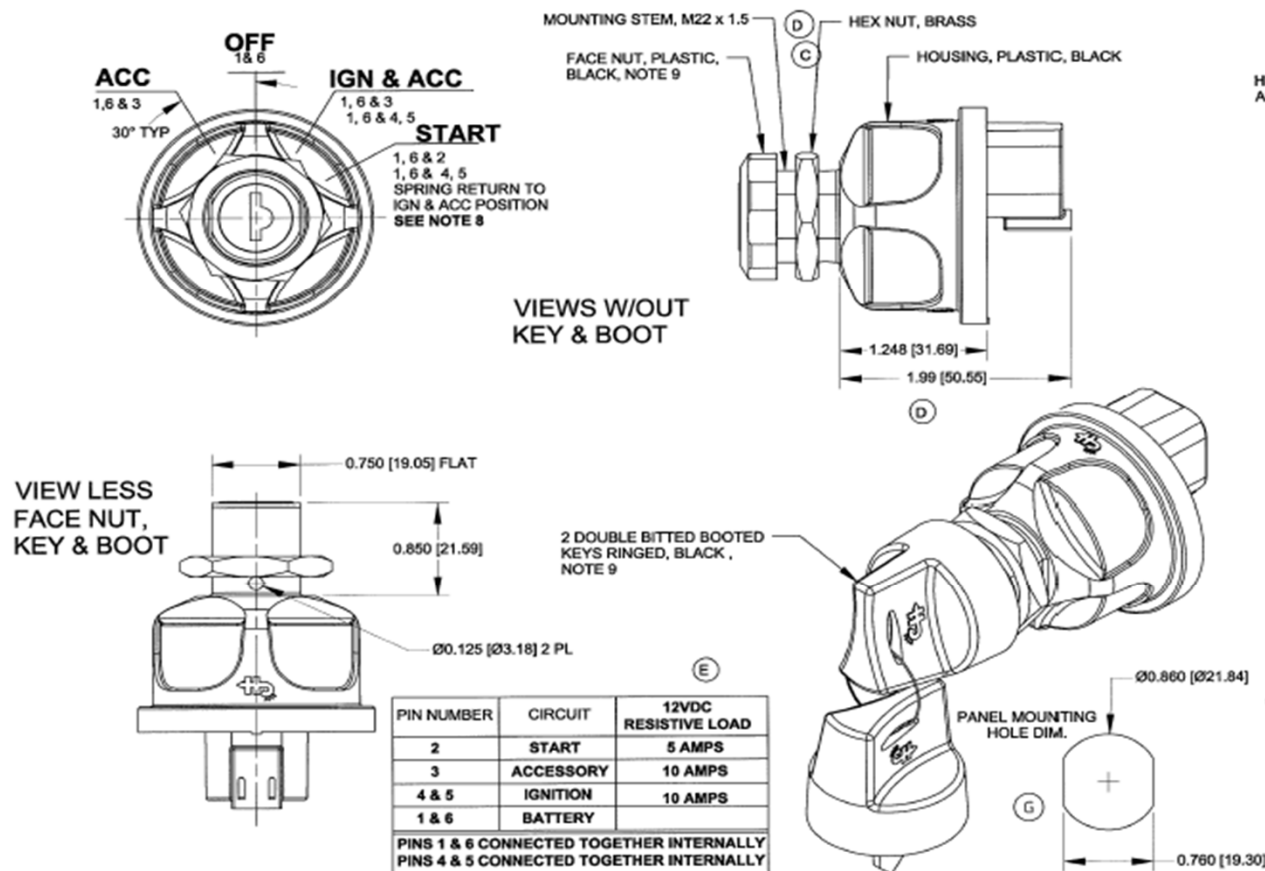

#### NOTES:

1. TOLERANCES PLUS OR MINUS 0.015 [0.38]
2. CONTACT AREA SEALED TO IP67
3. BACK OF SWITCH SEALED WHEN MATING CONNECTOR IS INSTALLED
4. FOR RESISTIVE LOAD RATING SEE CHART OR BACK OF SWITCH
5. KEY REMOVEABLE IN OFF POSITION ONLY
6. FOR PIN LOCATIONS SEE CHART
7. MATERIALS: HOUSING BLACK THERMOPLASTIC  
INTERNAL STATIONARY CONTACTS COPPER
8. START LOCKOUT FEATURE. SWITCH MUST GO TO "OFF" POSITION BEFORE THE START CIRCUIT CAN BE RE-ENERGIZED
9. KEY BOOT FITS OVER FACE NUT
10. SWITCH TESTED TO SAE J259, UL RECOGNIZED TO UL 1054
11. SW. MUST NOT BREAK CIRCUIT OR BE DAMAGED IF TORQUED TO 15 IN-LBS [1.69Nm]
12. IF THE APPLICATION MOUNTS THE SWITCH WITH THE LOCK CYLINDER OR LEVER APPROACHING VERTICAL, CONTACT THE FACTORY FOR AN APPLICATION REVIEW AND POTENTIAL ALTERNATE PRODUCTS BEFORE DESIGN IS SET.

\*Part not drawn to scale.

| DEL CITY                                                                                     | DESCRIPTION                                     |
|----------------------------------------------------------------------------------------------|-------------------------------------------------|
| Material                                                                                     | Black Thermoplastic                             |
| Rating                                                                                       | 10A @ 12VDC, 5A @ 24VDC, 3A @ 36VDC, 2A @ 48VDC |
| Positions                                                                                    | 4 (Acc - Off - Run - Start)                     |
| Keys                                                                                         | 2 Included                                      |
| Connector                                                                                    | Deutsch DT06-6S / Amphenol AT06-6S              |
| Sealed Keyed Ignition Switch, 4P (Acc-Off-Ign/Acc-Start) with Spring Return and Anti-Restart |                                                 |
| Date: 11/13/15                                                                               | PART NO: 73487                                  |

Uncontrolled copy