


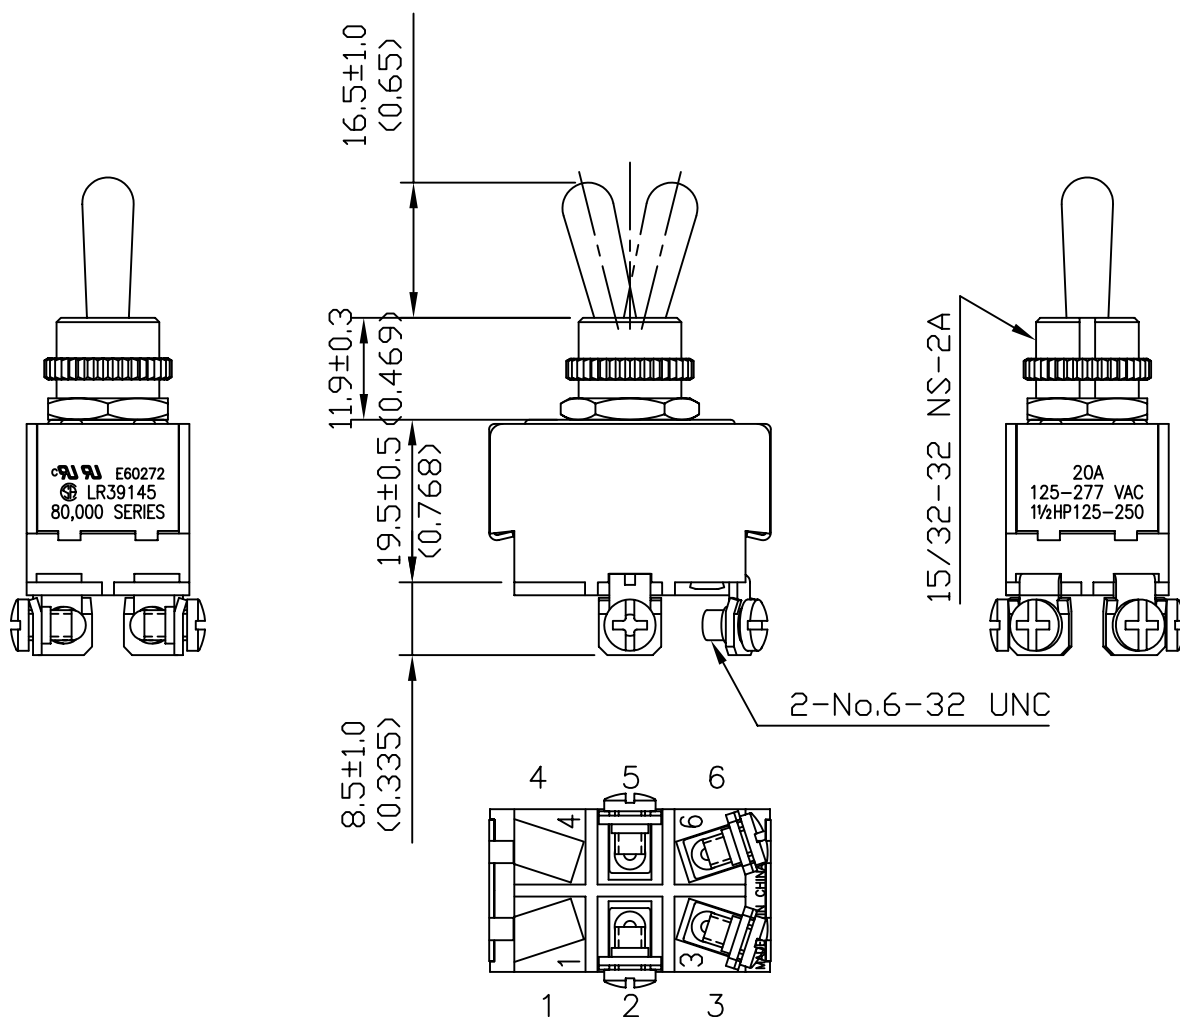


Rating	20A 125–277 VAC 1½HP 125–250VAC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	4P DPST ON–OFF		
Operation Force	2000g±400g		

KNURL NUT ASSY
HEX NUT ASSY

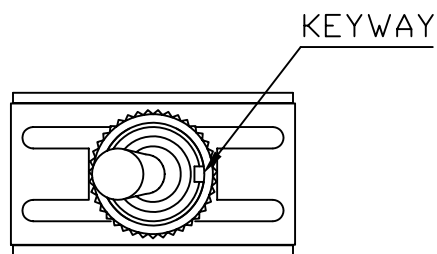

Unit	mm (inch)	DEL CITY P/N	7300021	REV.	1	
------	--------------	--------------	---------	------	---	---