


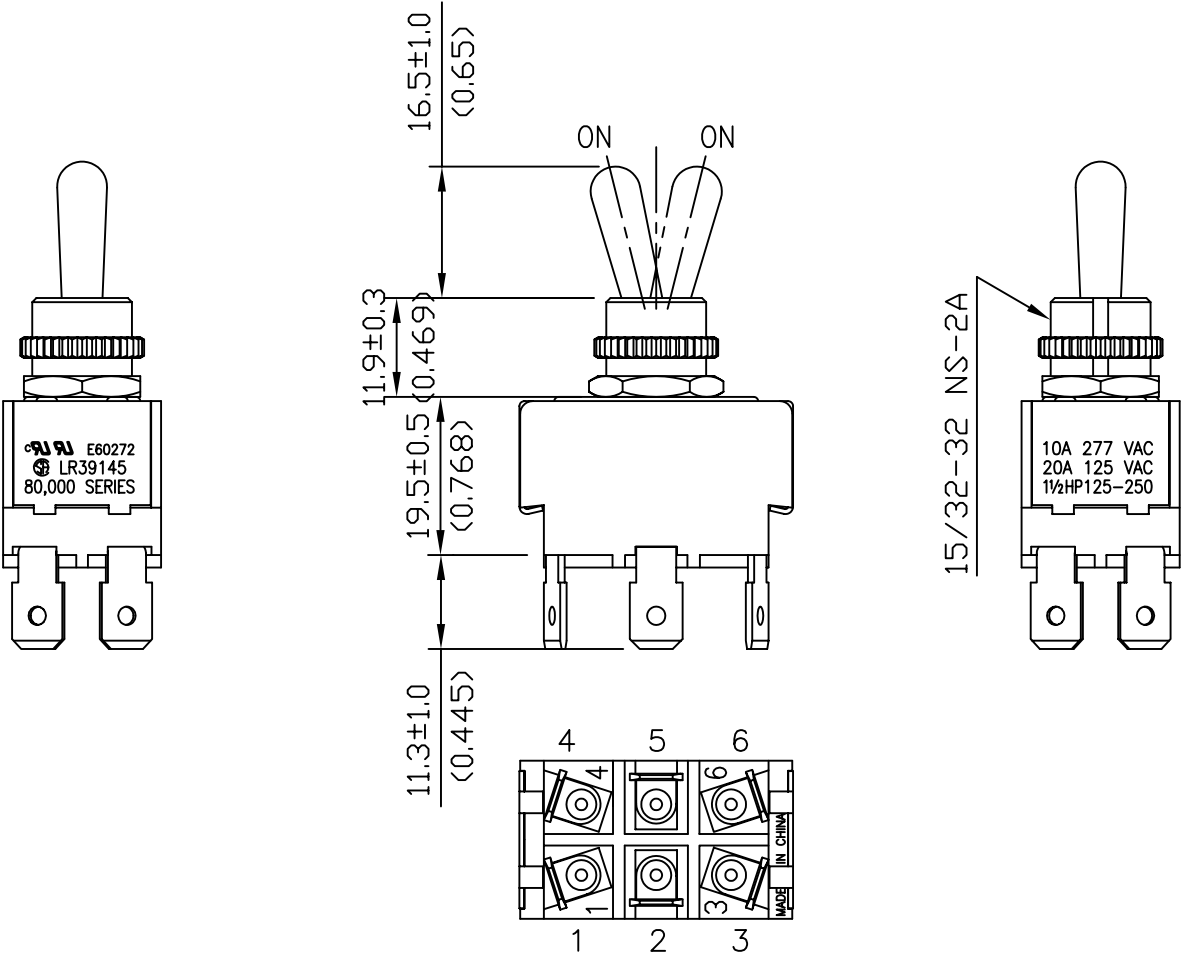


Rating	10A 277VAC, 20A 125VAC 1½HP 125–250VAC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	6P DPDT ON-ON		
Operation Force	1200g±300g		

HEX NUT ASSY
 KNURL NUT ASSY

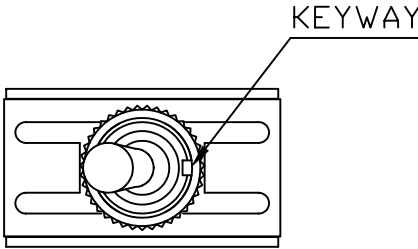

Unit	mm (inch)	DELCITY P/N	7300128	REV.	1	
------	--------------	-------------	---------	------	---	---