

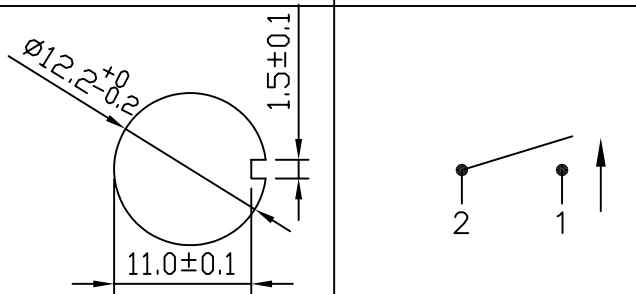
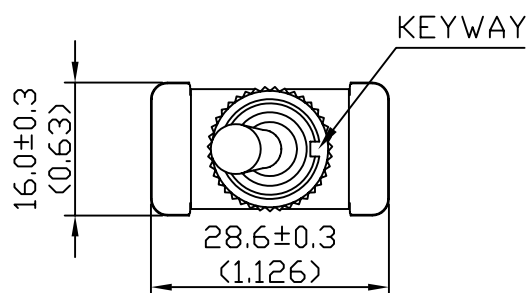

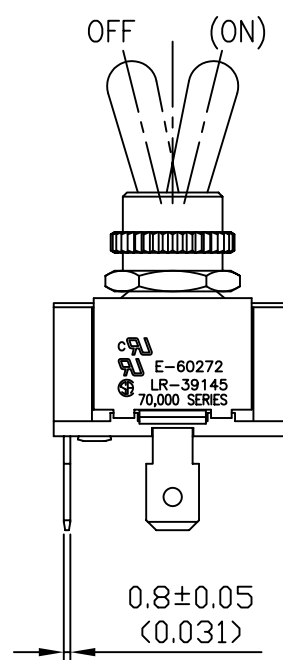


Rating	20A 125V,10A 277V AC 3/4HP 125-250 VAC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	2P SPST (ON)-OFF		
Operation Force	700g±200g		

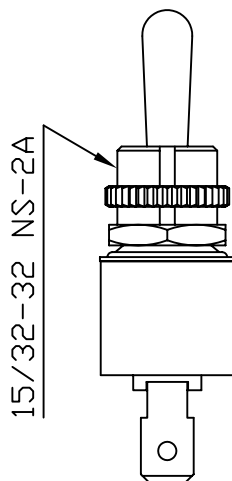

1 HEX NUT ASSY
1 KNURL NUT ASSY

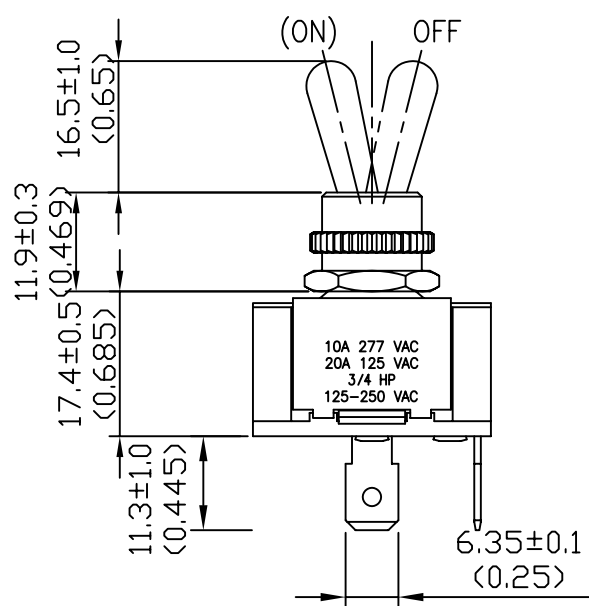

Unit	mm (inch)	DEL CITY P/N 7200101	REV. 1	
-------------	--------------	-----------------------------	---------------	---