


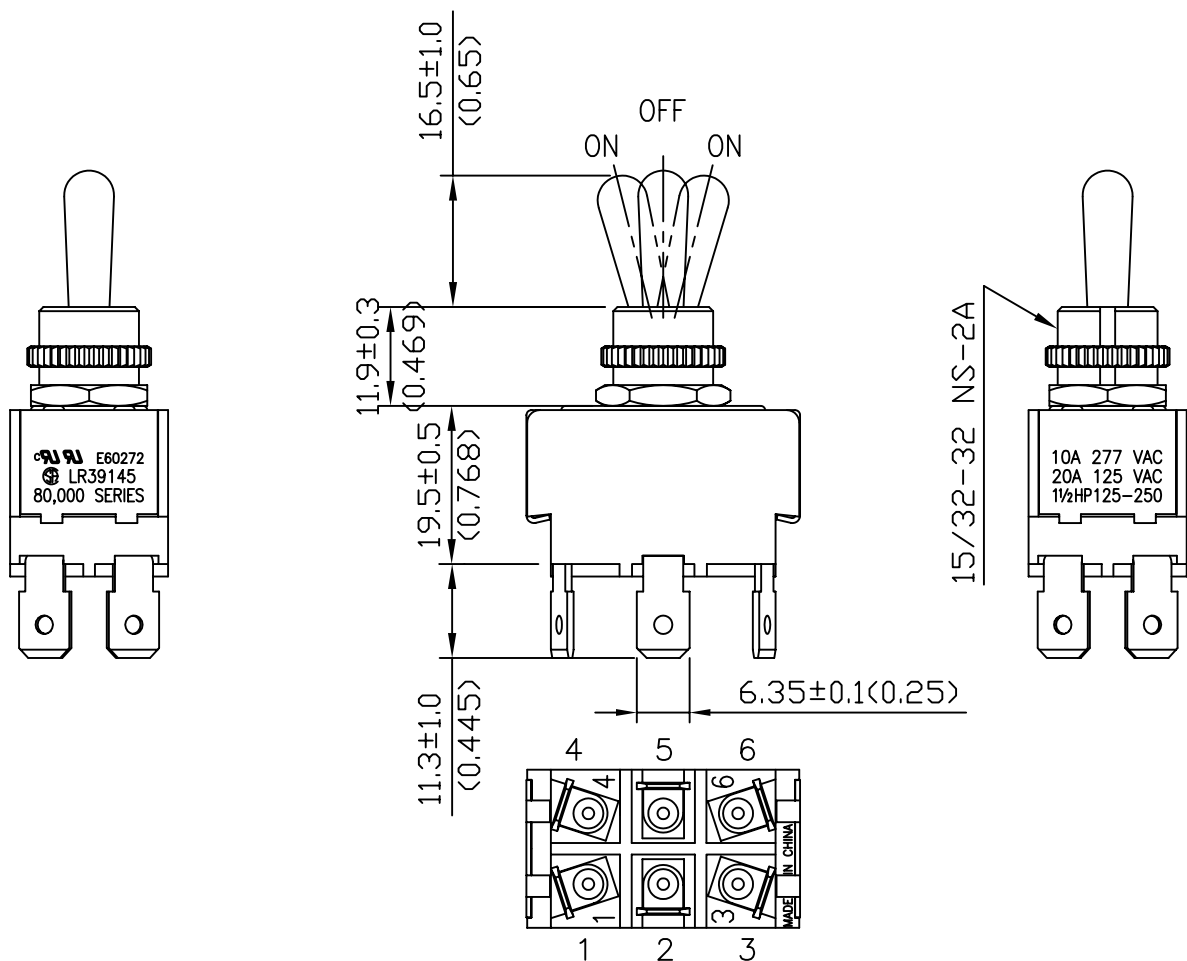


Rating	10A 277VAC, 20A 125VAC 1½HP 125–250VAC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	6P DPDT ON–OFF–ON		
Operation Force	OFF–ON: 1500g±400g ON–OFF: 800g±200g		

HEX NUT ASSY
KNURL NUT ASSY

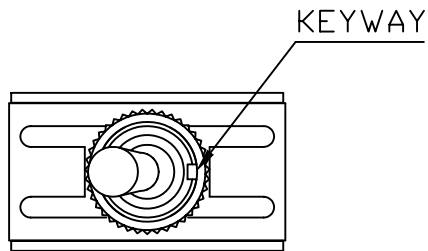

Unit	mm (inch)	DEL CITY P/N	7300131	REV.	1	DEL CITY
------	--------------	--------------	---------	------	---	----------