


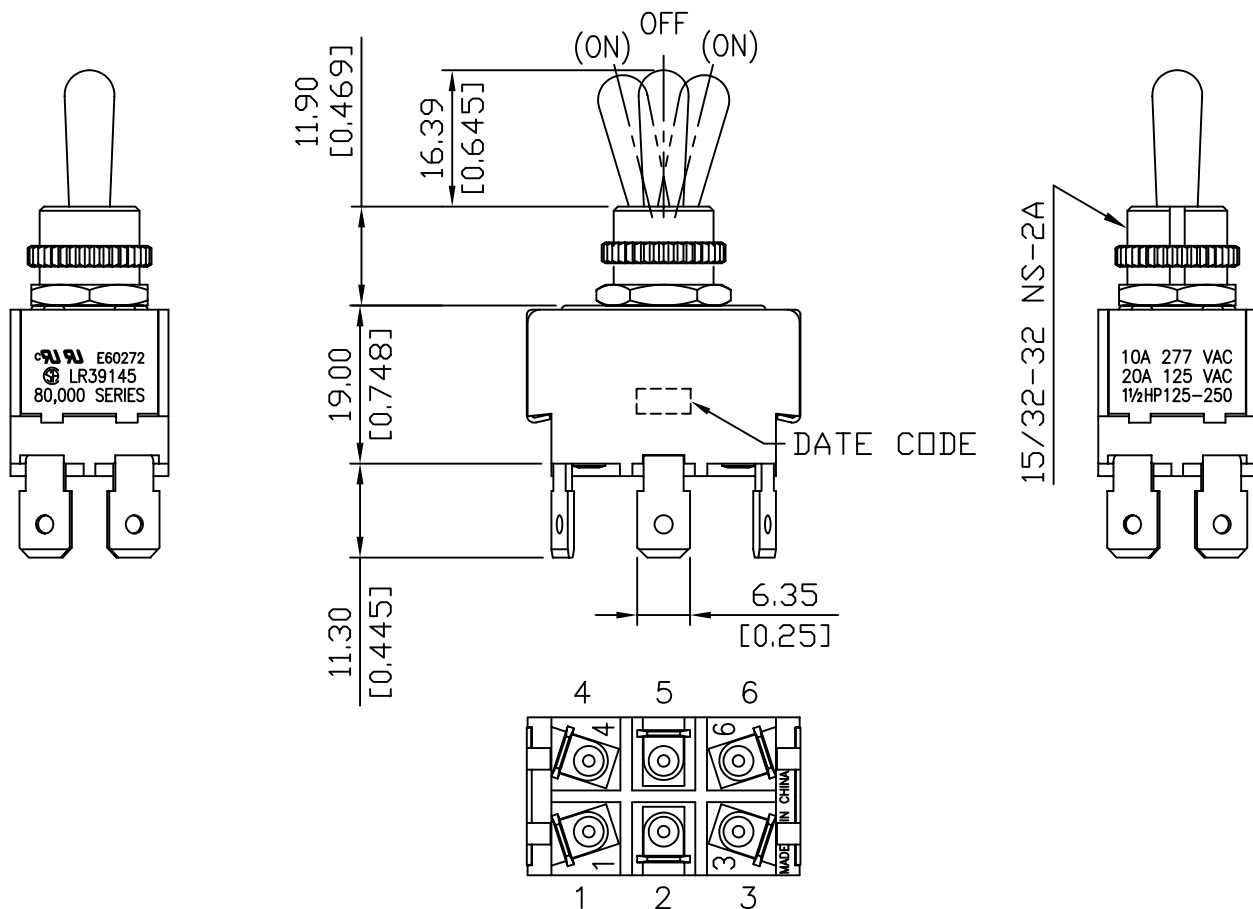


Rating	10A 277VAC, 20A 125VAC 1½HP125-250VAC		
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	6P DPDT (ON)-OFF-(ON)		
Operation Force	1400g±400g		

KNURL NUT ASST
HEX NUT ASST

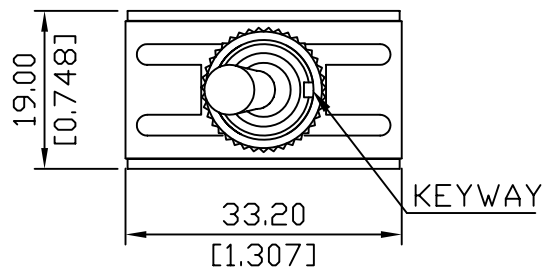

Unit	mm (inch)	DEL CITY P/N	7300135	REV.	1	
-------------	--------------	---------------------	---------	-------------	---	---