



**Example
Picture**

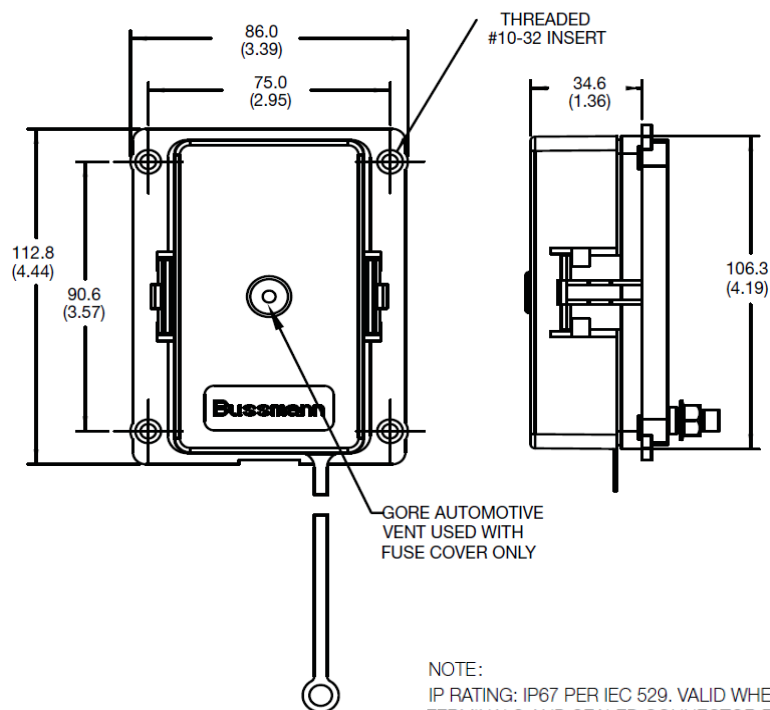


NOTE:

IP RATING: IP67 PER IEC 529. VALID WHEN COVER AND SEALED TERMINALS AND SEALED CONNECTOR PLUGS ARE PROPERLY INSTALLED. IN ORDER TO MAINTAIN A IP67 RATING IT IS RECOMMENDED THAT THE CUSTOMER PERIODICALLY APPLY A HEAVY DUTY SILICONE LUBRICANT TO THE HOUSING GASKET.

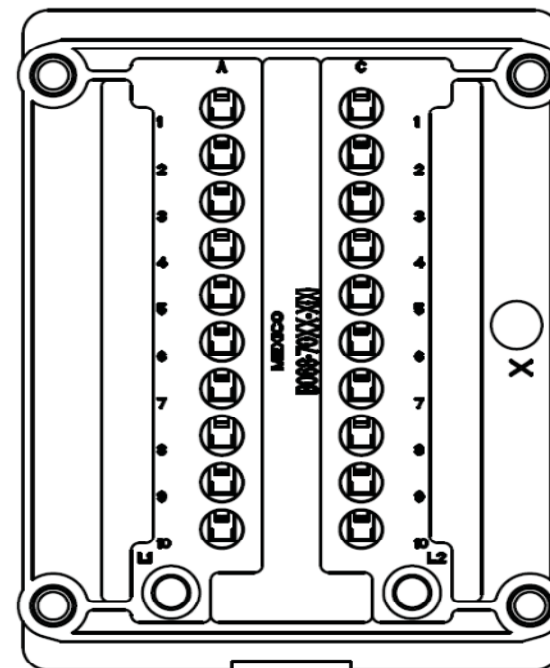

BOTTOM VIEW

*Part not drawn to scale.

 DEL CITY	DESCRIPTION
Fuse Input Side 1	80A max. - 30A max./Branch
Fuse Input Side 2	80A max. - 30A max./Branch
Overall Rating (MUST NOT EXCEED)	160A max./panel if Fuses Only
Terminals	Delphi Metri-Pack 280 Accepts #22-12 Gauge
Torque Rating	50 in-lbs. (5.5N) max.
Mounting Torque	24 in-lbs. (2.7N) max.
Housing	94VO Thermoplastic
Internal Bussing	Tin Plated Copper
IP Rating	IP66-IEC 60529 (valid when properly installed with cover and sealed terminals complete)
Sealed MINI® Fuse Panel	
DATE:	PART #:
4/1/2013	15303123