



Example
Picture

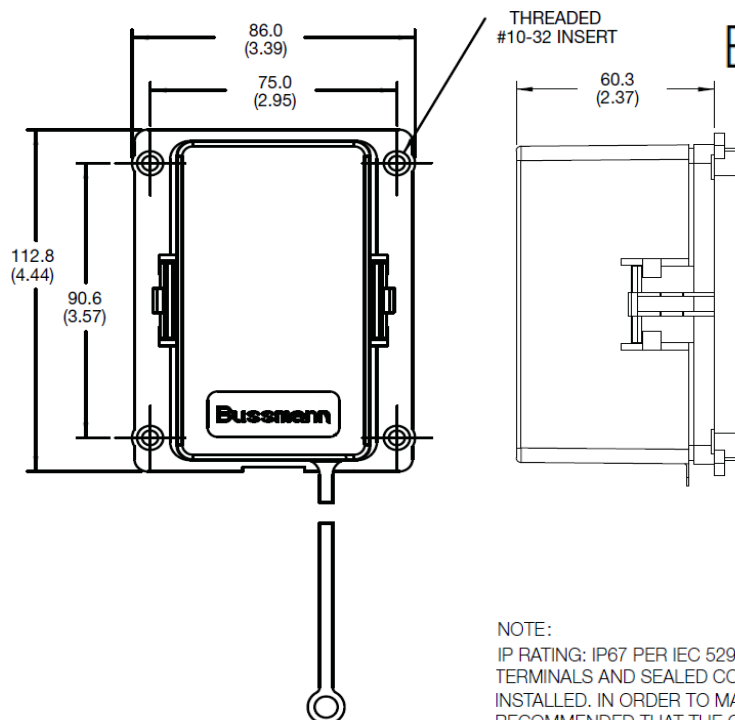


NOTE:
IP RATING: IP67 PER IEC 529. VALID WHEN COVER AND SEALED
TERMINALS AND SEALED CONNECTOR PLUGS ARE PROPERLY
INSTALLED. IN ORDER TO MAINTAIN A IP67 RATING IT IS
RECOMMENDED THAT THE CUSTOMER PERIODICALLY APPLY A
HEAVY DUTY SILICONE LUBRICANT TO THE HOUSING GASKET.

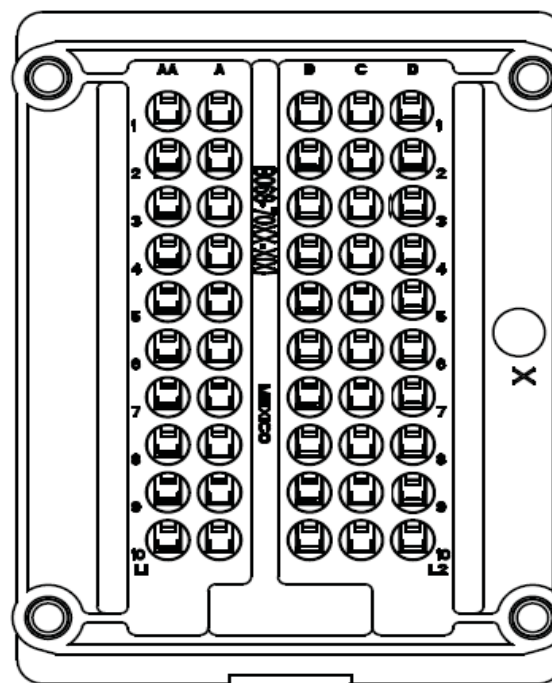

BOTTOM VIEW

*Part not drawn to scale.

	DESCRIPTION
Fuse Input Rating	80A max. - 30A max./Branch
Relay Input Rating	80A max. - 30A max./Branch
Overall Rating (MUST NOT EXCEED)	100A max./panel if Relays are used 160A max./panel if Fuses Only
Terminals	Delphi Metri-Pack 280 Accepts #22-12 Gauge
Torque Rating	50 in.-lbs. (5.5N) max.
Mounting Torque	24 in.-lbs. (2.7N) max.
Housing	94VO Thermoplastic
IP Rating	IP66-IEC 60529 (valid when properly installed with cover and sealed terminals complete)
Sealed MINI® Fuse and Micro Relay Panel	
DATE:	PART #:
4/1/2013	15303404