



**Example  
Picture**

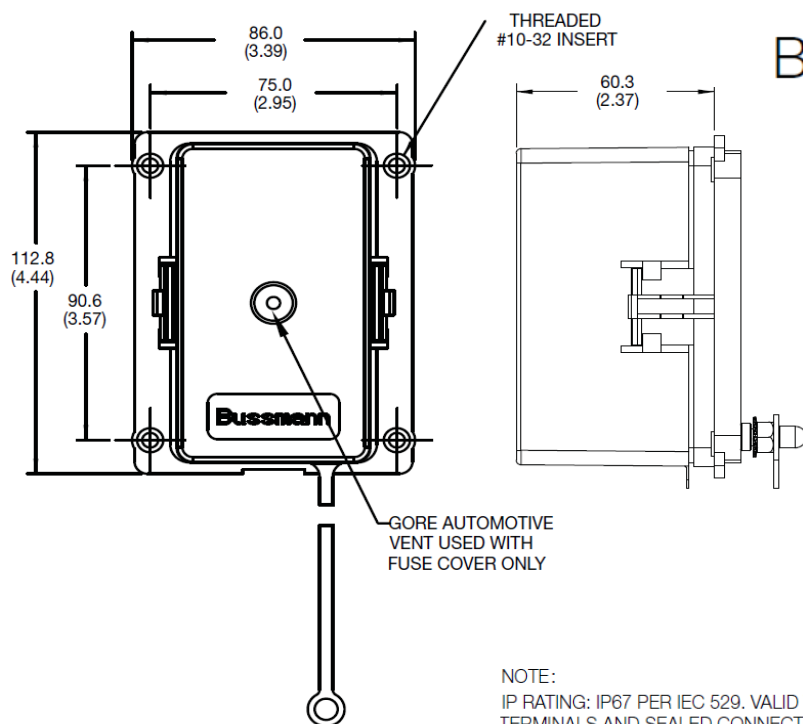


**NOTE:**

IP RATING: IP67 PER IEC 529. VALID WHEN COVER AND SEALED TERMINALS AND SEALED CONNECTOR PLUGS ARE PROPERLY INSTALLED. IN ORDER TO MAINTAIN A IP67 RATING IT IS RECOMMENDED THAT THE CUSTOMER PERIODICALLY APPLY A HEAVY DUTY SILICONE LUBRICANT TO THE HOUSING GASKET.

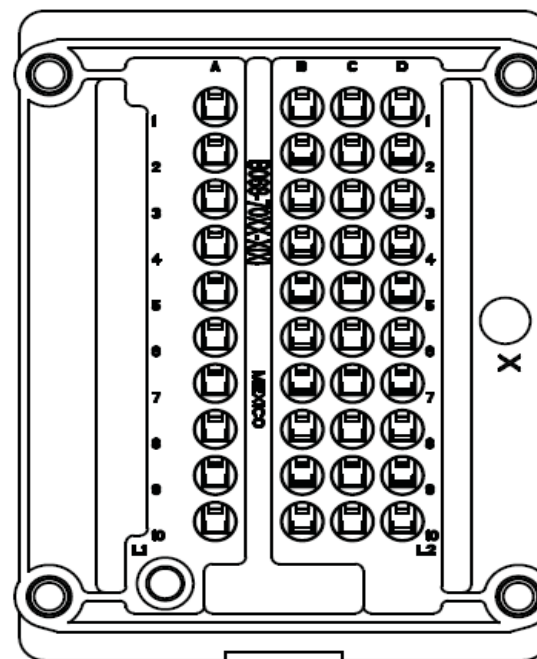

**BOTTOM VIEW**

\*Part not drawn to scale.

	DESCRIPTION
Fuse Input Rating	80A max. - 30A max./Branch
Relay Input Rating	80A max. - 30A max./Branch
Overall Rating (MUST NOT EXCEED)	100A max./panel if Relays are used 160A max./panel if Fuses Only
Terminals	Delphi Metri-Pack 280 Accepts #22-12 Gauge
Torque Rating	50 in-lbs. (5.5N) max.
Mounting Torque	24 in-lbs. (2.7N) max.
Housing	94VO Thermoplastic
IP Rating	IP66-IEC 60529 (valid when properly installed with cover and sealed terminals complete)
<b>Sealed MINI® Fuse and Micro Relay Panel</b>	
<b>DATE:</b>	<b>PART #:</b>
<b>4/1/2013</b>	<b>15303524</b>