Rating	10A 277VAC,20A 125VAC 1½HP125–250VAC	**Mount Hole**	**Circuit Structure**
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	6P DPDT ON–OFF–(ON)		
Operation Force	OFF–ON/(ON):1400g±400g ON–OFF:600g±200g		

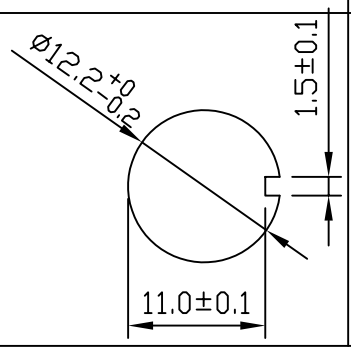



KNURL NUT ASST
HEX NUT ASST

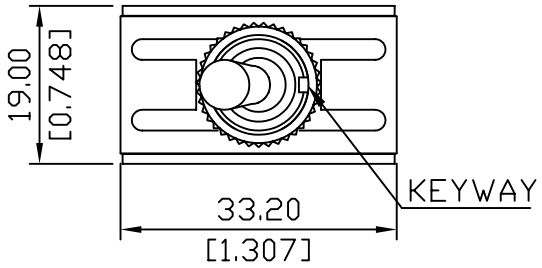

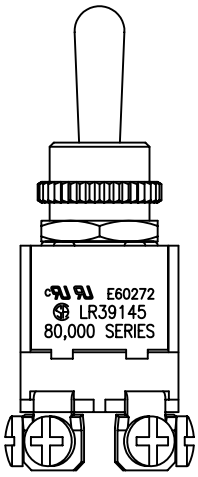

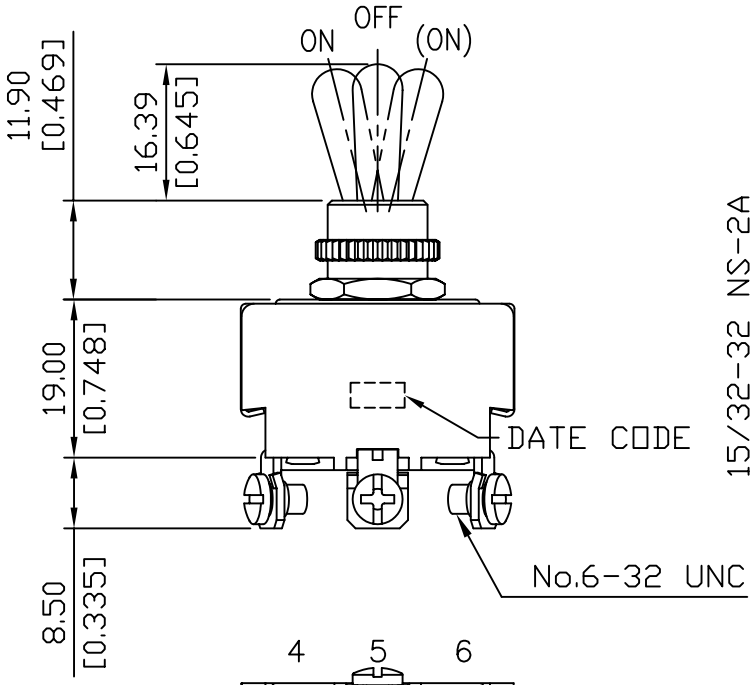

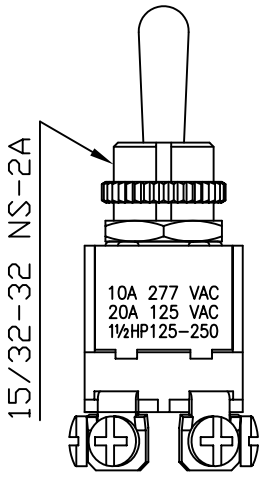



Unit	mm (inch)	**DELCITY P/N**	7300063	**REV.**	1	DEL CITY