
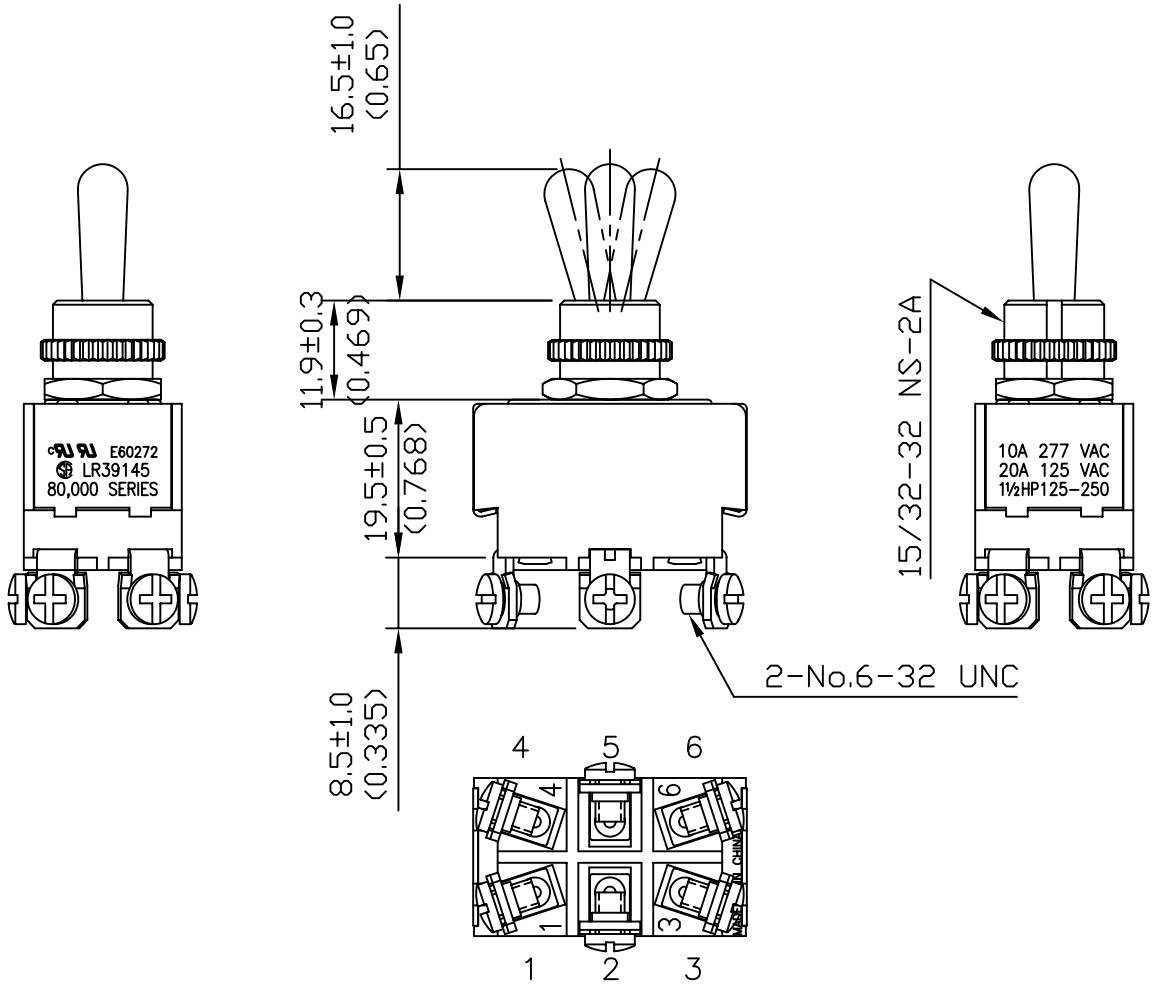


<b>Rating</b>	10A 277VAC, 20A 125VAC 1½HP 125-250VAC	<b>Mount Hole</b> 	<b>Circuit Structure</b> 
<b>Contact R</b>	50m ohm Max.		
<b>Insulation R</b>	DC 500V 100M ohm Min.		
<b>Dielectric Strength</b>	AC 1500V 1 minute		
<b>Circuit</b>	6P DPDT (ON)-OFF-(ON)		
<b>Operation Force</b>	1500g±400g		

KNURL NUT ASSY  
HEX NUT ASSY

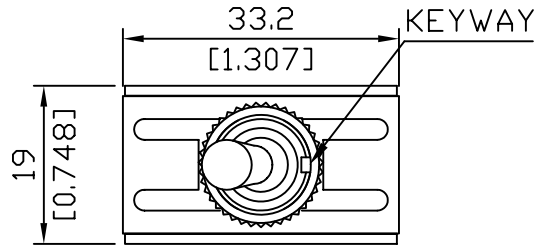

<b>Unit</b>	mm (inch)	<b>DEL CITY P/N</b> 73155	<b>REV.</b> 1	
-------------	--------------	---------------------------	---------------	--