


| | | | |
|-----------------------|---|---------------|-----------------|
| Rating | 20A 125V,10A 277V AC 3/4HP 125-250 VAC | Mounting Hole | Circuit Diagram |
| Contact Resistance | 50m ohm Max. | | |
| Insulation Resistance | DC 500V 100M ohm Min. | | |
| Dielectric Strength | AC 1500V 1 minute | | |
| Switch Function | 2P SPST ON-OFF | | |
| Operation Force | 600g±200g | | |
| Operating Temperature | 0°C~65°C | | |

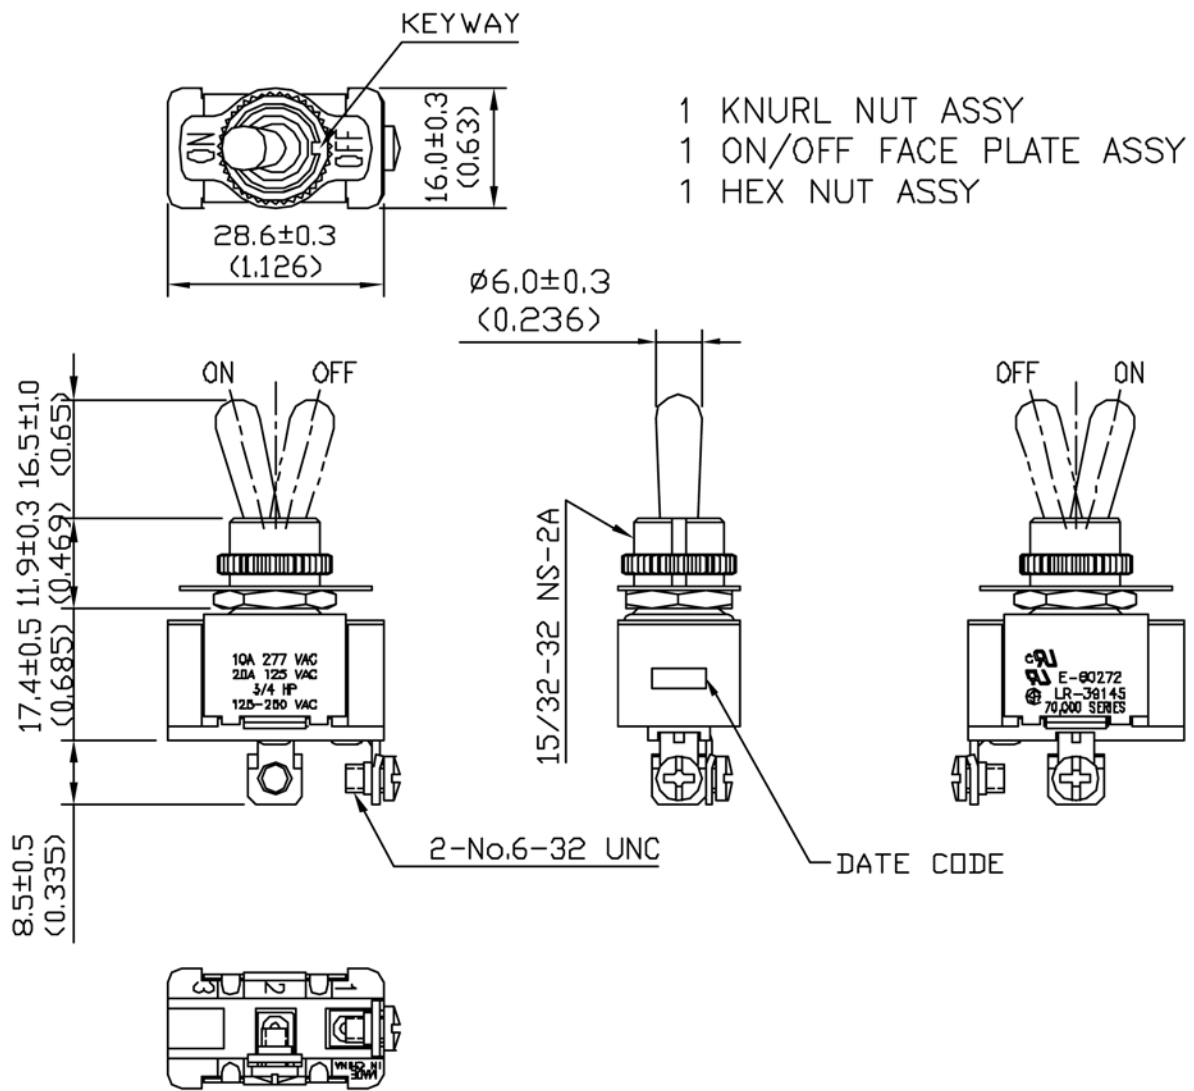

C8\DELACITY\<73185>_2

| | | | | |
|-----------|-----------|----------|--------------------------------------|--------------|
| | 01/14/'09 | | Add operating temperature : 0°C~65°C | |
| | 10/21/'02 | | REVISED | |
| | Date | Name | Descriptions | |
| Drawn | Checked | Approved | DELACITY P/N | 73185 |
| | | | Customer No. | 01-79672--1E |
| 01/14/'09 | | | | |
| | | | | REV. 2 |