


| | | | |
|------------------------------|---|----------------------|------------------------|
| Rating | 10A 277VAC, 20A 125VAC 1½HP 125-250VAC | Mounting Hole | Circuit Diagram |
| Contact Resistance | 50m ohm Max. | | |
| Insulation Resistance | DC 500V 100M ohm Min. | | |
| Dielectric Strength | AC 1500V 1 minute | | |
| Switch Function | 6P DPDT ON-ON | | |
| Operation Force | 1200g±300g | | |
| Operating Temperature | 0°C~65°C | | |

KNURL NUT ASSY
HEX NUT ASSY

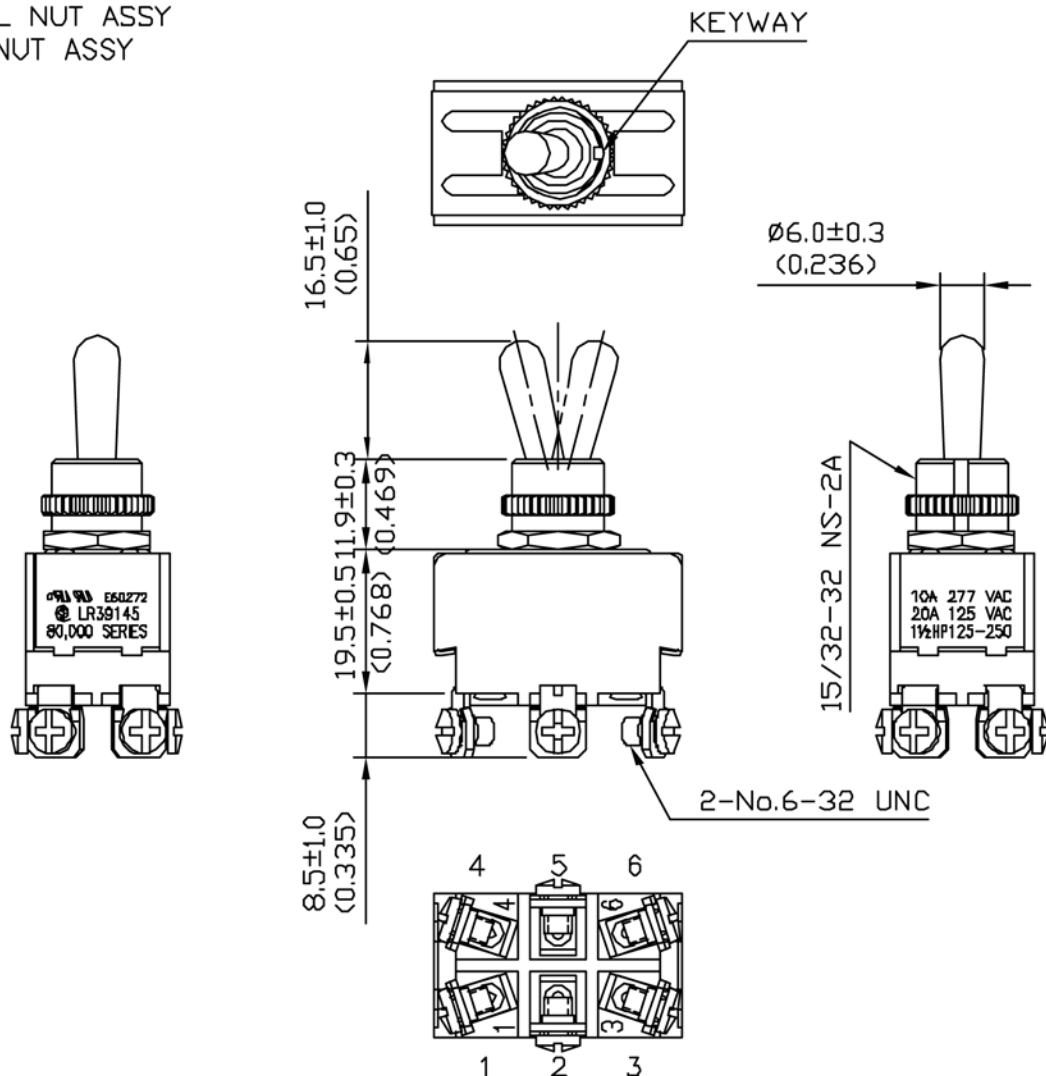

(73246)_1

| | | | | |
|--------------|----------------|-----------------|--------------------------------------|------------------|
| | 01/14/'09 | | Add operating temperature : 0°C~65°C | |
| | Date | Name | Descriptions | |
| Drawn | Checked | Approved | DEL CITY P/N | 73246 |
| | | | Customer No. | 2-89672--1D |
| 01/14/'09 | | | | |
| | | | | REV. 1 |