



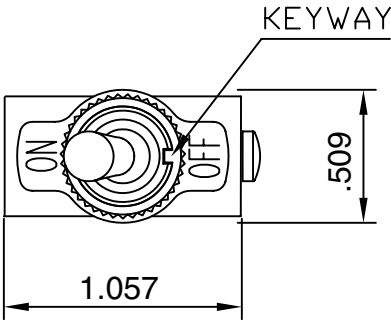



Rating	35A @ 6V DC 20A @ 12V DC	Mount Hole	Circuit Structure
Contact R	50m ohm Max.		
Insulation R	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Circuit	2P SPST ON-OFF		
Operation Force	800g ± 200g		

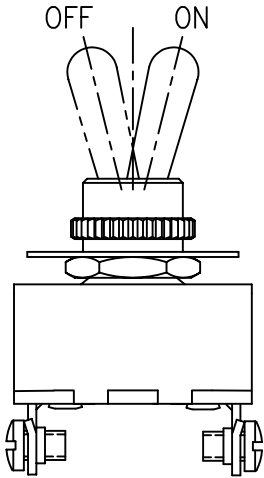

KNURL NUT ASSY
ON/OFF FACE PLATE ASSY
HEX NUT ASSY

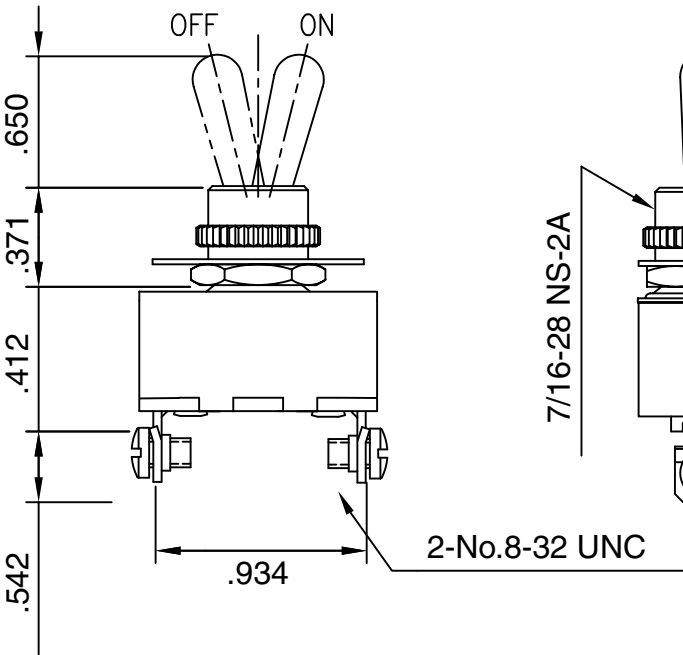

Unit	mm (inch)	DEL CITY P/N	73275	REV.	1	
------	--------------	--------------	-------	------	---	---