



VIEW LESS
KEY & BOOT

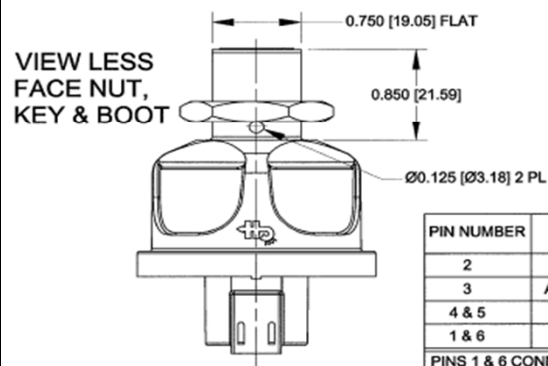

VIEW LESS
FACE NUT,
KEY & BOOT


PIN NUMBER	CIRCUIT	12VDC RESISTIVE LOAD
2	START	5 AMPS
3	ACCESSORY	10 AMPS
4 & 5	IGNITION	10 AMPS
1 & 6	BATTERY	

PINS 1 & 6 CONNECTED TOGETHER INTERNALLY
PINS 4 & 5 CONNECTED TOGETHER INTERNALLY

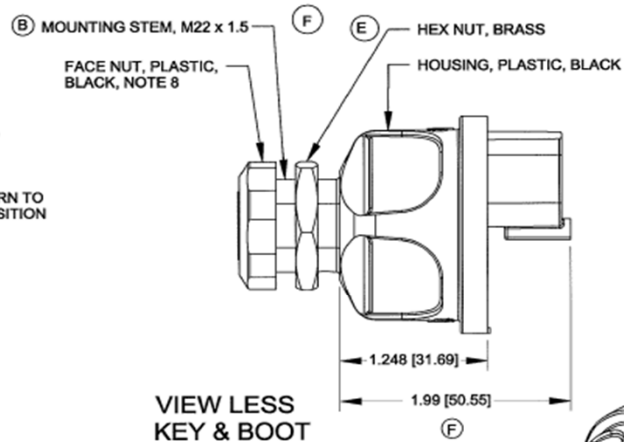


VIEW LESS
KEY & BOOT

2 DOUBLE BITTED BOOTED
KEYS RINGED, BLACK,
NOTE 8

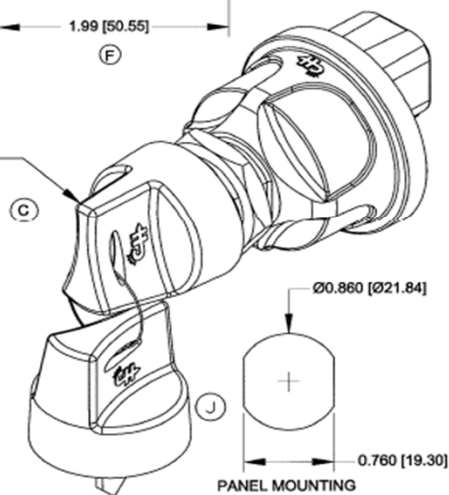

PANEL MOUNTING
HOLE DIM.

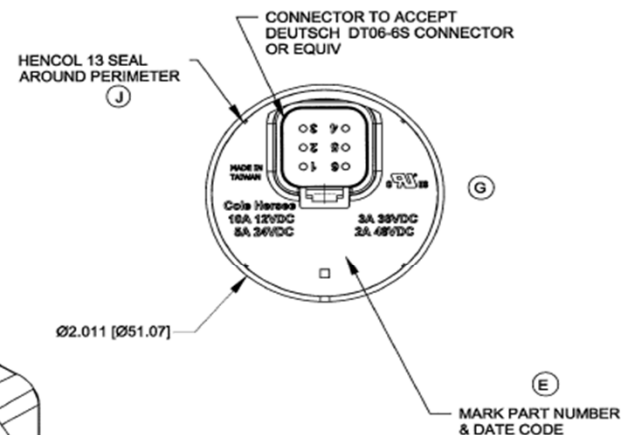

NOTES:

1. TOLERANCES PLUS OR MINUS 0.015 [0.38]
2. CONTACT AREA SEALED TO IP67
3. BACK OF SWITCH SEALED WHEN MATING CONNECTOR IS INSTALLED
4. FOR RESISTIVE LOAD RATING SEE CHART OR BACK OF SWITCH
5. KEY REMOVEABLE IN OFF POSITION ONLY
6. FOR PIN LOCATIONS SEE CHART
7. MATERIALS: HOUSING BLACK THERMOPLASTIC
INTERNAL STATIONARY CONTACTS COPPER
8. KEY BOOT FITS OVER FACE NUT
9. SWITCH TESTED TO SAE J259,
UL RECOGNIZED TO UL 1054
10. SW. MUST NOT BREAK CIRCUIT OR BE DAMAGED IF TORQUED TO
15 IN-LBS [1.69Nm]
11. IF THE APPLICATION MOUNTS THE SWITCH WITH THE LOCK
CYLINDER OR LEVER APPROACHING VERTICAL, CONTACT THE
FACTORY FOR AN APPLICATION REVIEW AND POTENTIAL
ALTERNATE PRODUCTS BEFORE DESIGN IS SET.

*Part not drawn to scale.

DEL CITY	DESCRIPTION
Material	Black Thermoplastic
Rating	10A @ 12VDC, 5A @ 24VDC, 3A @ 36VDC, 2A @ 48VDC
Positions	4 (Acc - Off - Run - Start)
Keys	2 Included
Connector	Deutsch DT06-6S / Amphenol AT06-6S
Sealed Keyed Ignition Switch, 4P (Acc-Off-Ign/Acc-Start) with Spring Return	
Date: 11/13/15	PART NO: 73486

uncontrolled copy