



PART NUMBER	COLOR	SIZE (in)	SUPPLIED		AFTER RECOVERY
			MIN. INSIDE DIAMETER (D)	MAX. INSIDE DIAMETER (d)	TOTAL WALL THICKNESS (t)
96061505	BLACK	1/8"	0.125984252	0.039370079	0.039±0.00787
96062005	BLACK	3/16"	0.18503937	0.059055118	0.04331±0.00984
96062505	BLACK	1/4"	0.251968504	0.078740157	0.0472±0.00984
96063005	BLACK	3/8"	0.374015748	0.118110236	0.0531±0.00984
96063505	BLACK	1/2"	0.5	0.157480315	0.0689±0.0118
96064505	BLACK	3/4"	0.751968504	0.236220472	0.0787±0.0118
96065505	BLACK	1"	1	0.31496063	0.09055±0.0118
96066505	BLACK	1-1/2"	1.57480315	0.511811024	0.10039±0.0118

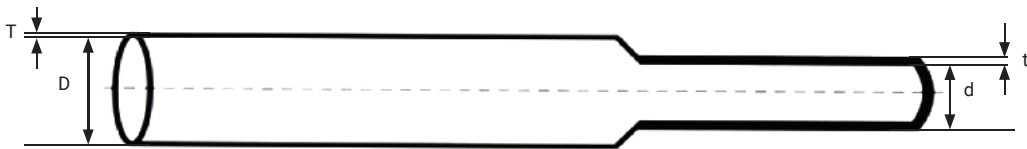

		HEAT SHRINK TUBING - 6" DUAL WALL
AFTER AGING		
SHRINK TEMPERATURE	≥110°C	
SHRINK TIME	5 MINUTES	
TEMPERATURE RANGE	-40-125°C	
LONGITUDINAL SHRINKING RATIO	10~10%	
TENSILE STRENGTH	≥10.4 Mpa	
ELONGATION RATIO	≥200%	
AGING IN CIRCULATING-AIR OVEN	(158±1.0)°C, 168 HOURS	
TENSILE STRENGTH	≥7.3MPa	
ELONGATION RATIO	≥100%	
DIELECTRIC VOLTAGE WITHSTAND	600V	
VOLUME RESISTIVITY	≥1014Ω·cm	
VOLTAGE RESISTANCE	≥2500 (60s)	
FLAMMABILITY	VW-1	
NOT TO SCALE		