



A B C D E F G H I J K

DEL PART NUMBER	LENGTH	A	B	C	D	E	F
920210	6"	4.6mm	150mm	10.8mm	6.5mm	0.25mm	4.54mm
9202	6"	4.6mm	150mm	10.8mm	6.5mm	0.25mm	4.54mm
920410	8"	4.6mm	200mm	10.8mm	6.5mm	0.25mm	4.54mm
9204	8"	4.6mm	200mm	10.8mm	6.5mm	0.25mm	4.54mm
920610	11"	4.6mm	280mm	10.8mm	6.5mm	0.25mm	4.54mm
9206	11"	4.6mm	280mm	10.8mm	6.5mm	0.25mm	4.54mm
920810	14"	4.6mm	360mm	10.8mm	6.5mm	0.25mm	4.54mm
9208	14"	4.6mm	360mm	10.8mm	6.5mm	0.25mm	4.54mm

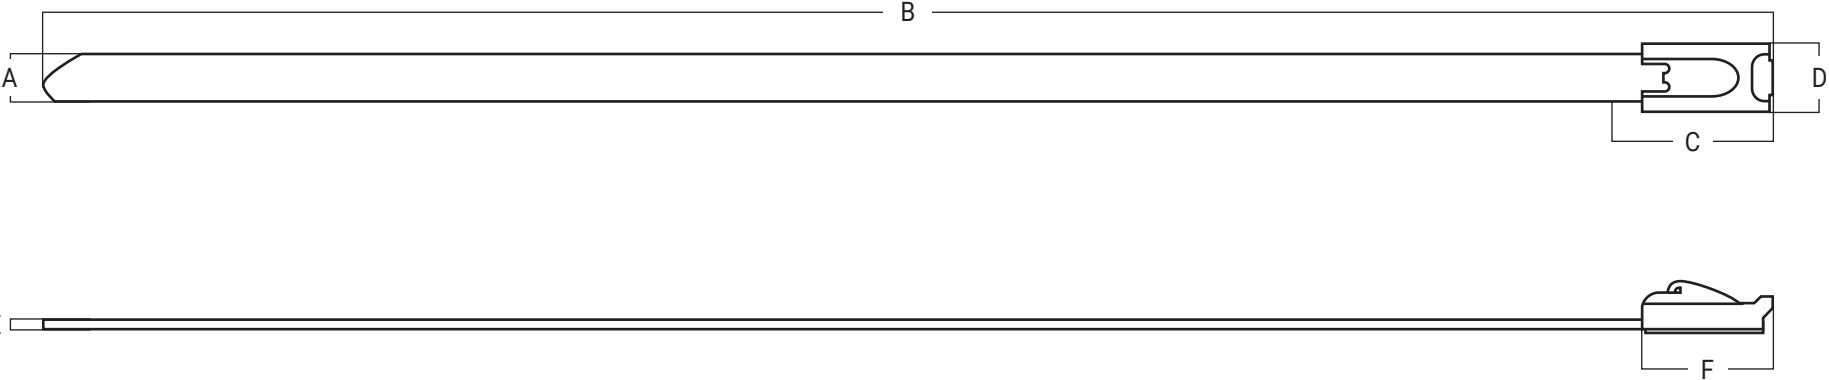

	TOLERANCE UNLESS OTHERWISE SPECIFIED ±0.0"
MATERIAL	#304 STAINLESS STEEL
RATING	UV RESISTANT & UL RATED
TEMPERATURE	-80°C (-112°F) TO 538°C (1000°F)
STAINLESS STEEL CABLE TIES, 200 LB MAX TENSILE STRENGTH	
NOT TO SCALE	

A B C D E F G H I J K