
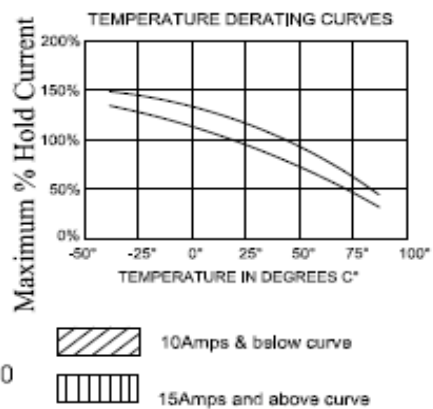
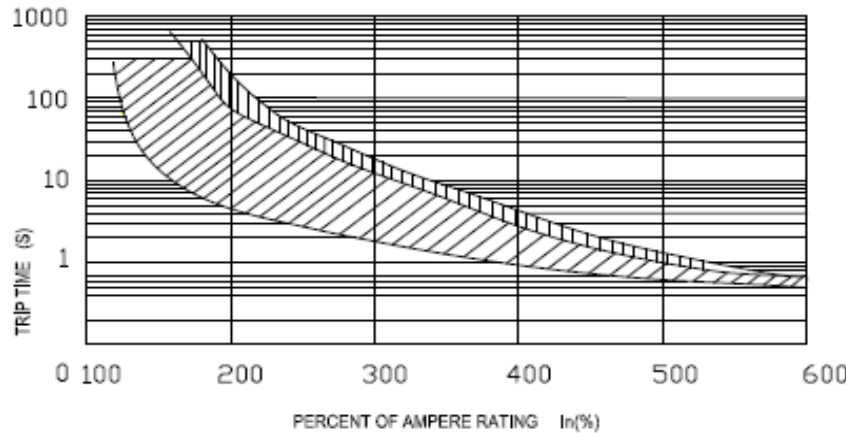


P/N	Amperage	Cover Color
72605	10	Silver
72615	15	Silver
72625	20	Silver
72620	25	Silver
72635	30	Silver

Rev.
A

 DESCRIPTION	
Voltage	14 VDC
Amperage	See Chart
Temperature	-40°F to 185°F (-40°C to 85°C)
Breaking Capacity	>500 Cycles @ 2 x In >100 Cycles @ 4 x In
Ultimate Interrupt	2000A @ 26 VDC
Interrupt Rating	150 A @ 14 VDC (for 5-10 A), 225 A @ 14 VDC (for 15 A), 300 A @ 14 VDC (for 20 A), 450 A @ 14 VDC (for 25-30 A), 600 A @ 14 VDC (40 A), 750 A @ 14 VDC (50 A)
Endurance	>100 Cycles @ 4ir, 50A x 300
Voltage Drop	<150 mV
Breaker Type	Type I - Auto Reset
Body Material	UL-Rated 94 V-0 Thermoplastic
Cover Material	Aluminum
Terminal Material	Tin-Plated Copper Alloy
Terminal Size	5.2 mm Blades
Compliance	SAE J553 ISO 10924-4
Circuit Breaker, Auto Reset, ATC/ATO® Blade Configuration	
DATE:	PART #:
5/27/2020	See Chart



*Part not drawn to scale.
¥Uncontrolled Copy

